



March 2009

# Mercedes-Benz Reset Service Indicator Guide

Mercedes-Benz











# Contents

<b>Models 203 and 209 (C-Class and CLK-Class)</b> .....	<b>3</b>
<b>Models 166, X166, 172, 204, X204, 207, 212 and 218 (M-, SLK-, C-,GLK-, E-, and CLS-Class)</b> .....	<b>4</b>
<b>Model 211 Up to 8/31/2003 (E-Class)</b> .....	<b>5</b>
<b>Model 211 as of 09/01/2003 (E-Class)</b> .....	<b>6</b>
<b>Model 219 (CLS-Class)</b> .....	<b>7</b>
<b>Models 221 and 216 (S-Class and CL-Class)</b> .....	<b>8</b>
<b>Model 171 (SLK-Class)</b> .....	<b>9</b>
<b>Model 230 up to MY2007 (SL-Class)</b> .....	<b>10</b>
<b>Model 230 (SL-Class from MY2008 to Present)</b> .....	<b>11</b>
<b>Models 164, X164 and 251 (M-Class, GL-Class, and R-Class)</b> .....	<b>12</b>

## Models 203 and 209 (C-Class and CLK-Class)

















### Reset Service Indicator

1. Insert key into ignition, switch to position "1".
2. Press buttons  or  repeatedly until the mileage is displayed within the Multifunction display.
3. Press cluster illumination button (1) 3 times in short succession. The battery voltage will be displayed and an audible signal will sound.
4. Turn key in ignition to position "2"
5. Press the up  /  buttons until the service menu appears.
6. Press cluster illumination button (1) once. The Oil Type menu is displayed.
7. Use the  and  buttons to select the oil used for the service.
8. Press the up  /  buttons to confirm. The display will show: "Reset Oil Confirmation. Push R-Button for 3 seconds".
9. Press and hold the cluster illumination button (1) for 3 seconds. The message "Service confirmed" is displayed.

## Models 166, X166, 172, 204, X204, 207, 212 and 218 (M-, SLK-, C-, GLK-, E-, and CLS-Class)









### Reset Service Indicator

1. Insert key into ignition, switch to position "1". The mileage counter has to be displayed.
2. Press  repeatedly until the TRIP option is highlighted.
3. Press and hold  and within 1 second press  and hold both for 5 seconds. The shop menu is displayed.
4. Press  repeatedly until "Assyst Plus" is highlighted and confirm with . Options "Service Data" and "Full Service" are displayed.
5. Press  until "Full Service" is highlighted. Confirm with .
6. Press  until "Conf. Full Serv." is highlighted, confirm with . The display shows "Service carried out?."
7. Press  to select "Yes". Confirm with . "Cannot be undone" displays.
8. Press  until "Confirm" is highlighted. Confirm by pressing . The display reads "Full Service carried out".
9. Confirm by pressing .


## Model 211 Up to 8/31/2003 (E-Class)









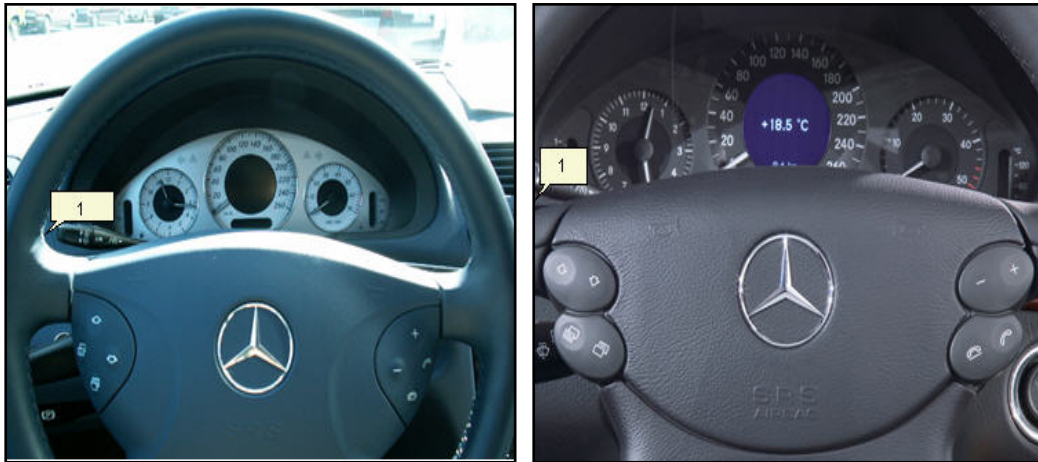

### Reset Service Indicator

1. Turn key in ignition switch to position "2."
2. Use buttons  /  until the "Service" menu is shown in the Multifunction Display.
3. Press and hold Reset Button R (1) until the Service Menu is displayed.
4. Use buttons  and  to highlight option "Confirm"
5. Press buttons  or  to confirm.

## Model 211 as of 09/01/2003 (E-Class)











### Reset Service Indicator

1. Insert key into ignition, switch to position "1".
2. Press buttons  or  repeatedly until the mileage is displayed within the Multifunction display.
3. Press cluster illumination button (1) 3 times in short succession. The battery voltage will be displayed
4. Press the up  /  buttons until the service menu appears.
5. Use the  and  buttons to select menu option „Confirm“.
6. Press  until "Complete Service" is selected.
7. Confirm "Complete Service" with button . The display will show "Service Confirmed".

## Model 219 (CLS-Class)













### Reset Service Indicator

1. Insert key into ignition, switch to position "1".
2. Press buttons  or  repeatedly until the mileage displays within the Multifunction display.
3. Press reset button (1) 3 times in short succession. The battery voltage will be displayed
4. Press the up  /  buttons until the service menu appears.
5. Use the  and  buttons to select menu option „Confirm“.
6. Press button  until "Complete Service" is selected.
7. Confirm "Complete Service" with button . The display will show "Service Confirmed".

## Models 221 and 216 (S-Class and CL-Class)



### Reset Service Indicator









1. Insert key into ignition, switch to position "1". The mileage counter has to be displayed.
2. Press and hold  and within 1 second press  and hold both for 5 seconds. The shop menu is displayed.
3. Press  repeatedly until "Assyst Plus" is highlighted and confirm with .
4. Press  until "Service carried out" is highlighted. Confirm with .
5. Press  to select "Service due". Confirm with .
6. Press  to select "Full Service". Confirm with .




## Model 171 (SLK-Class)





### Reset Service Indicator

1. Insert key into ignition, switch to position "1".
2. Press buttons  or  repeatedly until the mileage is displayed within the Multifunction display.
3. Press cluster illumination button (1) 3 times in short succession. The battery voltage will be displayed
4. Press the up  /  buttons until the service menu appears.
5. Use the  and  buttons to select menu option "Confirm".
6. Press  until "Complete Service" is selected.
7. Confirm "Complete Service" with . The display will show "Service Confirmed".
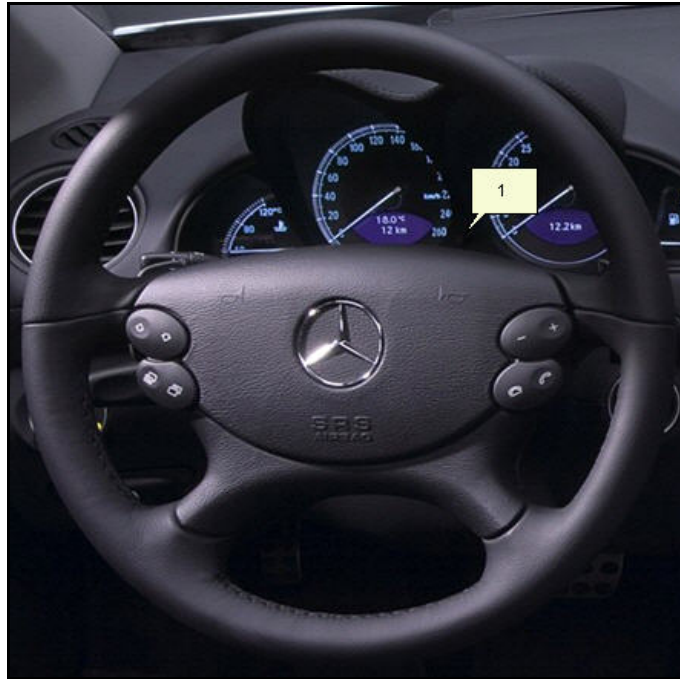
## Model 230 up to MY2007 (SL-Class)







### Reset Service Indicator

1. Insert key into ignition and switch to position "1"
2. Press button  or  until the main mileage display is shown.
3. Press reset button R (1) and hold for 3 seconds.
4. The message "DO YOU WANT TO RESET THE SERVICE INTERVAL?"  
"CONFIRM WITH R BUTTON" displays.
5. Press button R (1) again.
6. Switch off ignition and remove the key.

## Model 230 (SL-Class from MY2008 to Present)











### Reset Service Indicator

1. Switch ignition to position "2"
2. Press button  or  until the main mileage display is shown.
3. Press button  or  until the service menu appears in the left display.
4. Press button R (1) for approximately 5 seconds. The message "Service interval...  
Reset: Press reset button for 3 seconds" appears.
5. Press and hold button R (1) for approximately 3 seconds to confirm.
6. Switch off ignition and remove key.

## Models 164, X164 and 251 (M-Class, GL-Class, and R-Class)



### Reset Service Indicator

1. Insert key into ignition, switch to position "1".
2. Press buttons  or  repeatedly until the mileage is displayed within the Multifunction display.
3. Press cluster illumination button (1) 3 times in short succession. The battery voltage will be displayed
4. Press the up  /  buttons until the service menu appears.
5. Use the  and  buttons to select menu option "Confirm".
6. Press button  until "Complete Service" is selected.
7. Confirm "Complete Service" with button . The display will show "Service Confirmed".

Feedback welcome on [startekinfo.team@mbusa.com](mailto:startekinfo.team@mbusa.com).